



FERM[®]

POWER SINCE 1965

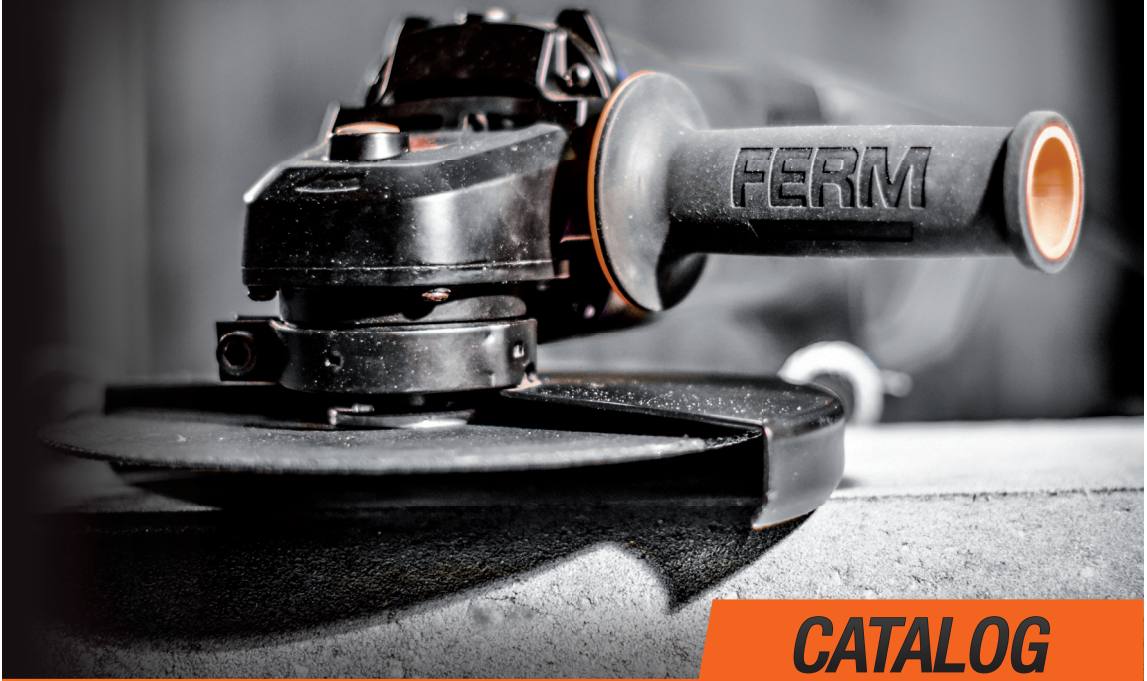

CATALOG

DESIGNED AND DEVELOPED IN THE NETHERLANDS 

OUR MISSION

FAST GROWTH OF OUR WORLDWIDE "FERM FAMILY"

FERM, founded in 1965, is one of the leading European power tool brands. Our headquarters is based in Zwolle, The Netherlands.

FERM develops and produces a wide range of high quality power tools for the semi-professional & professional market.

All FERM products are designed and tested according strict European standards and our company is known for its quality products and excellent service.

Rick Rosberg
CEO



Headquarters Zwolle



Reception



Warehouse



Engineering and design



Training room



Quality control

TABLE OF CONTENTS

FERM POWER-FS

CORDLESS	6
DRILLING	8
GRINDING	10
SAWING	16
COMPRESSORS	17

FERM POWER


DRILLING	20
SANDING AND POLISHING	21
SAWING	24
PLANING	27
MILLING	28
PAINT AND CEMENT MIXER	29
GENERATORS	29
WELDING AND BRAZING	30
COMPRESSORS	30
HOBBY	31
BLOWING	33
AUTOMOTIVE	33
TRANSPORT	34

FERM POWER AQUA

HIGH PRESSURE CLEANERS	36
-------------------------------------	----

FERM POWER-FS



DESIGNED AND DEVELOPED IN **THE NETHERLANDS** 

FERM POWER-FS



Features

- 7Nm torque
- USB charger
- LED work light
- Ergonomic design with soft grip

Specifications

Mains voltage	100-240V~, 50Hz (charger)
Voltage	3.6V-1.3Ah
No load speed	180/min
Max screw capacity	5 mm
Charging time	2-3 hours

Includes: USB charger adaptor - USB charging cable - magnetic bit holder - 10 screwdriver bits (S2) - storage case

LI-ION SCREWDRIVER

3.6V-1.3AH CDM1108S

FERM POWER-FS



Features

- 30Nm torque
- 2 mechanical speed settings
- Variable electronic speed
- LED work light and battery indicator

Specifications

Mains voltage	100-240V~, 50Hz (charger)
Voltage	10.8V-1.3Ah
No load speed position 1	0-350/min
No load speed position 2	0-1200/min
Number of torque settings	20 + drill
Chuck capacity	0.8-10 mm

Includes: 2 Li-Ion batteries - 45 min quick charger - 2 screw driver bits (S2) - storage case

Accessories: CDA1075S, CDA1035, CDA1062, CDA1063

Optional: with 1 battery (CDM1109S)

CORDLESS LI-ION DRILL

10.8V-1.3AH CDM1112S

FERM POWER-FS



Features

- 38Nm torque
- 2 mechanical speed settings
- Variable electronic speed
- Metal single-sleeve chuck
- LED work light and battery indicator

Specifications

Mains voltage	230-240V~, 50Hz (charger)
Voltage	14.4V-1.5Ah
No load speed position 1	0-400/min
No load speed position 2	0-1400/min
Number of torque settings	23 + drill
Chuck capacity	1-10 mm

Includes: 2 Li-Ion batteries - 1 hour charger -
2 double sided bits (S2) - storage case

Accessories: CDA1075S, CDA1035, CDA1062,
CDA1063

Optional: with 1 battery (CDM1110S)

CORDLESS LI-ION DRILL

14.4V-1.5AH CDM1113S

FERM POWER-FS



Features

- 44Nm torque
- 2 mechanical speed settings
- Variable electronic speed
- Metal single-sleeve chuck
- LED work light and battery indicator

Specifications

Mains voltage	230-240V~, 50Hz (charger)
Voltage	18V-1.5Ah
No load speed position 1	0-400/min
No load speed position 2	0-1400/min
Number of torque settings	23 + drill
Chuck capacity	1-10 mm

Includes: 2 Li-Ion batteries - 1 hour charger -
2 double sided bits (S2) - storage case

Accessories: CDA1075S, CDA1035, CDA1062,
CDA1063

Optional: with 1 battery (CDM1111S)

CORDLESS LI-ION DRILL

18V-1.5AH CDM1114S

FERM POWER-FS



Features

- Compact impact drill with soft grip
- Variable speed control
- High quality chuck with lock-function

Mains voltage	230-240V~, 50Hz
Power input	710W
No load speed	0-3000/min
No load impact rate	0-48000/min
Chuck capacity	2-13 mm

Includes: side handle - depth limiter
Accessories: CDA1035, CDA1062, CDA1063

IMPACT DRILL

710W PDM1036S

FERM POWER-FS



Features

- Compact impact drill with soft grip
- Variable speed control
- High quality chuck with lock-function

Specifications

Mains voltage	230-240V~, 50Hz
Power input	710W
No load speed	0-3000/min
No load impact rate	0-48000/min
Chuck capacity	2-13 mm

Includes: side handle - depth limiter - storage case
Accessories: CDA1035, CDA1062, CDA1063

IMPACT DRILL

710W PDM1038S

FERM POWER-FS



Features

- Heavy duty with metal gear head and soft grip
- 2 mechanical speed settings and variable speed control
- Metal chuck with lock-function
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	1010W
No load speed position I	0-1000/min
No load speed position II	0-3000/min
No load impact rate pos. I	0-16000/min
No load impact rate pos. II	0-48000/min
Chuck capacity	1.5-13 mm

Includes side handle - depth limiter - storage case

Accessories: CDA1035, CDA1062, CDA1063

IMPACT DRILL

1010W PDM1037S

FERM POWER-FS

Features

- 1.8 Joule impact energy
- 4 functions: drilling, hammer drilling, chiseling, free rotation chiseling
- Electronic speed control
- Soft grip handle
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	600W
No load speed	0-1100/min
No load impact rate	0-5800/min
Chuck	SDS-plus

Includes: side handle - depth limiter - 3 SDS-PLUS drills (6, 8, 10 mm) - flat SDS-PLUS chisel - pointed SDS-PLUS chisel - storage case



ROTARY HAMMER

600W HDM1026S

FERM POWER-FS



Features

- 2.8 Joule impact energy
- 4 functions: drilling, hammer drilling, chiseling, free rotation chiseling
- Electronic speed control
- Soft grip handle
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	950W
No load speed	0-960/min
No load impact rate	0-4550/min
Chuck	SDS-plus

Includes: side handle - depth limiter - 3 SDS-PLUS drills (6, 8, 10 mm) - flat SDS-PLUS chisel - pointed SDS-PLUS chisel - storage case

ROTARY HAMMER

950W HDM1027S

FERM POWER-FS



Features

- Heavy duty angle grinder
- Lock-on switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	220-240V~, 50Hz
Power input	750W
No load speed	11000/min
Disc diameter	100mm
Spindle	M10

Includes: side handle - spanner - hex key

ANGLE GRINDER

750W-100MM AGM1072P

FERM POWER-FS



Features

- Compact angle grinder with soft grip
- Paddle switch
- Quick release protection guard
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	750W
No load speed	12000/min
Disc diameter	100mm
Spindle	M10

Includes: side handle - spanner

ANGLE GRINDER

750W-100MM AGM1064S

FERM POWER-FS



Features

- Heavy duty angle grinder
- Lock-on switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	220-240V~, 50Hz
Power input	750W
No load speed	11000/min
Disc diameter	115mm
Spindle	M14

Includes: side handle - spanner - hex key

Accessories: AGA1018, AGA1020

ANGLE GRINDER

750W-115MM AGM1067P

FERM POWER-FS



Features

- Compact angle grinder with soft grip
- Paddle switch
- Quick release protection guard
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	750W
No load speed	12000/min
Disc diameter	115mm
Spindle	M14

Includes: side handle - spanner

Accessories: AGA1018, AGA1020

ANGLE GRINDER

750W-115MM AGM1060S

FERM POWER-FS



Features

- Slim angle grinder with soft grip
- Lock-off safety switch
- Quick release protection guard
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	1100W
No load speed	12000/min
Disc diameter	115mm
Spindle	M14

Includes: side handle - spanner

Accessories: AGA1018, AGA1020

ANGLE GRINDER

1100W-115MM AGM1065S

FERM POWER-FS



Features

- Heavy duty angle grinder
- Lock-on switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	220-240V~, 50Hz
Power input	850W
No load speed	11000/min
Disc diameter	125mm
Spindle	M14

Includes: side handle - spanner - hex key

Accessories: AGA1019, AGA1021

ANGLE GRINDER

850W-125MM AGM1068P

FERM POWER-FS



Features

- Compact angle grinder with soft grip
- Paddle switch
- Quick release protection guard
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	900W
No load speed	12000/min
Disc diameter	125mm
Spindle	M14

Includes: side handle - spanner

Accessories: AGA1019, AGA1021

ANGLE GRINDER

900W-125MM AGM1061S

FERM POWER-FS



Features

- Slim angle grinder with soft grip
- Lock-off safety switch
- Quick release protection guard
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	1100W
No load speed	12000/min
Disc diameter	125mm
Spindle	M14

Includes: side handle - spanner

Accessories: AGA1019, AGA1021

ANGLE GRINDER

1100W-125MM AGM1062S

FERM POWER-FS



Features

- Angle grinder with soft grip
- Soft start
- Lock-off safety switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	2000W
No load speed	8000/min
Disc diameter	180mm
Spindle	M14

Includes: side handle - spanner - hex key

Optional: with D-handle (AGM1066S)

ANGLE GRINDER

2000W-180MM AGM1075S

FERM POWER-FS



Features

- Soft start
- Heavy duty angle grinder
- Lock-off switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	220-240V~, 50Hz
Power input	2000W
No load speed	8500/min
Disc diameter	180mm
Spindle	M14

Includes: side handle - spanner - hex key

ANGLE GRINDER

2000W-180MM AGM1069P

FERM POWER-FS



Features

- Heavy duty angle grinder
- Soft start
- Lock-off safety switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	220-240V~, 50Hz
Power input	2400W
No load speed	8500/min
Disc diameter	180mm
Spindle	M14

Includes: side handle - spanner - hex key

ANGLE GRINDER

2400W-180MM AGM1076P

FERM POWER-FS



Features

- Soft start
- Heavy duty angle grinder
- Lock-off switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	220-240V~, 50Hz
Power input	2000W
No load speed	6500/min
Disc diameter	230mm
Spindle	M14

Includes: side handle - spanner - hex key

ANGLE GRINDER

2000W-230MM AGM1070P

FERM POWER-FS



Features

- Heavy duty angle grinder with soft grip
- Soft start
- Lock-off safety switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	230-240V~, 50Hz
Power input	2000W
No load speed	6600/min
Disc diameter	230mm
Spindle	M14

Includes: side handle - spanner - hex key
Optional: with D-handle (AGM1063S)

ANGLE GRINDER

2000W-230MM AGM1074S

FERM POWER-FS



Features

- Heavy duty angle grinder
- Soft start
- Lock-off safety switch
- Spindle lock
- 3 m rubber cable

Specifications

Mains voltage	220-240V~, 50Hz
Power input	2400W
No load speed	6500/min
Disc diameter	230mm
Spindle	M14

Includes: side handle - spanner - hex key

ANGLE GRINDER

2400W-230MM AGM1077P

FERM POWER-FS



Features

- Heavy duty chop saw
- Soft start
- Quick lock vice
- Spindle lock
- 3m rubber cable

Specifications

Mains voltage	230V~, 50Hz
Power input	2300W
No load speed	3900/min
Max. cutting capacity at 90°	100x130 mm Ø120 mm
Max. cutting capacity at 45°	85x100 mm Ø85 mm

Includes: cutting disc

CHOP SAW

2300W-355MM COM1005P

FERM POWER-FS



Features

- Powerful pump, less than 2 minutes to fill the tank to max. pressure
- Universal, pressure adjustment from 0-8 bar
- Silent direct drive induction motor
- 2 universal 1/4" quick couplings
- 2 manometers for tank and outlet pressure

Specifications

Mains voltage	230V~, 50Hz
Power input	1100W-1.5HP
No load speed	2850/min
Air displacement	161 liter/min

Accessories: CRA1015, CRA1024, CRA1025, CRA1026, CRA1027, ATA1018, ATA1021, ATA1025, ATA1026, ATA1027, ATA1033, ATM1036, ATM1050, ATM1039, ATM1040, ATM1041, ATM1042, ATM1044

OIL FREE COMPRESSOR

1.5HP-1100W-24L CRM1047S

FERM POWER-FS



Features

- Powerful 2 cilinder pump
- Universal, pressure adjustment from 0-8 bar
- Silent direct drive induction motor
- 2 universal 1/4" quick couplings
- 2 manometers for tank and outlet pressure

Specifications

Mains voltage	230V~, 50Hz
Power input	2200W-3HP
No load speed	2850/min
Air displacement	412 liter/min

Includes: oil


Accessories: CRA1015, CRA1024, CRA1025, CRA1026, CRA1027, ATA1018, ATA1021, ATA1025, ATA1026, ATA1027, ATA1033, ATM1036, ATM1050, ATM1039, ATM1040, ATM1041, ATM1042, ATM1044

OIL LUBRICATED COMPRESSOR

3HP-2200W-50L CRM1048S

FERM POWER



DESIGNED AND DEVELOPED IN **THE NETHERLANDS** 



Features

- Keyless chuck
- Adjustable torque with drill mode
- Variable electronic speed control

Specifications

Mains voltage	230V~, 50Hz
Voltage	12V-1.3Ah
Max torque	10Nm
No load speed	0-550/min
Number of torque positions	16 + 1

Includes: 2 batteries - battery charger - 2 double-sided bits - storage case

Accessories: CDA1042, CDA1035, CDA1062, CDA1063

CORDLESS DRILL

12V-1.3AH NICD CDM1104



Features

- Keyless chuck
- Adjustable torque with drill mode
- Variable electronic speed control
- 2 speed settings

Specifications

Mains voltage	230V~, 50Hz
Voltage	14.4V-1.3Ah
Max torque	15Nm
No load speed position I	0-400/min
No load speed position II	0-1150/min
Number of torque positions	16 + 1

Includes: 2 batteries - battery charger - 2 double-sided bits - storage case

Accessories: CDA1043, CDA1035, CDA1062, CDA1063

CORDLESS DRILL

14.4V-1.3AH NICD CDM1062



Features

- Keyless chuck
- Adjustable torque with drill mode
- Variable electronic speed control
- 2 speed settings

Specifications

Mains voltage	230V~, 50Hz
Voltage	18V-1.3Ah
Max torque	15Nm
No load speed position I	0-400/min
No load speed position II	0-1150/min
Number of torque positions	16 + 1

Includes: 2 batteries - battery charger - 2 double-sided bits - storage case

Accessories: CDA1044, CDA1035, CDA1062, CDA1063

CORDLESS DRILL

18V-1.3AH NICD CDM1090



Features

- 3 functions: drilling, hammer drilling, chiseling
- 3 m rubber cable

Specifications

Mains voltage	230V~, 50Hz
Power input	850W
No load speed	800/min
No load impact rate	4000/min
Chuck	SDS-plus

Includes: side handle - 3 SDS-PLUS drills (8, 10, 12 mm) - flat SDS-PLUS chisel - pointed SDS-PLUS chisel - storage case

ROTARY HAMMER

850W HDM1028



Features

- 2 functions: drilling, hammer drilling
- Electronic speed control

Specifications

Mains voltage	230V~, 50Hz
Power input	500W
No load speed	0- 3000/min
No load impact rate	0-48000/min
Key chuck	10 mm

Includes: chuck key

IMPACT DRILL

500W PDM1039



Features

- 2 functions: drilling, hammer drilling
- Electronic speed control

Specifications

Mains voltage	230V~, 50Hz
Power input	800W
No load speed	0- 3000/min
No load impact rate	0-48000/min
Key chuck	13 mm

Includes: chuck key - depth limiter - side handle

IMPACT DRILL

800W PDM1040



Features

- Cast iron base for maximum stability
- Industrial standard key chuck
- Cross laser
- In height adjustable working table with two way angle adjustment from 0° to 45°

Specifications

Mains voltage	230V~, 50Hz
Power input	350W
No load speed	580-2650/min
Number of speeds	5

Includes: chuck key - working table - 2 hex keys - 2 batteries
Accessories: TDA1013

BENCH PILLAR DRILL

350W TDM1025



Features

- Ergonomic design with soft grip
- Heavy duty storage case
- Multi grip handle
- Variable speed setting wheel

Specifications

Mains voltage	230V~, 50Hz
Power input	1400W
No load speed	0-3200/min
Disc diameter	180 mm

Includes: Velcro® supporting disc -polishing pad - wool polishing pad - sanding sheet - hex key - storage case
Accessories: AGA1022, AGA1023

ANGLE POLISHER

1400W-180MM AGM1037



Features

- Dust proof switch
- P36 & P60 grinding stones for fine and rough grinding
- Spark arresters

Specifications

Mains voltage	230V~, 50Hz
Power input	150W
No load speed	2950/min
Stone dimensions	150x16 mm
Stone bore	12.7 mm

Includes: grinding stones (P36 & P60) - 2 spark arresters - 2 work rests - safety glasses
 Accessories: BGA1053, BGA1054

BENCH GRINDER

150W-150MM BGM1019



Features

- Dust proof switch
- P36 & P80 grinding stones for fine and medium grinding
- Spark arrester

Specifications

Mains voltage	230V~, 50Hz
Power input	250W
No load speed	2950/min
Grey stone dimensions	150x20 mm
White stone dimensions	150x40 mm
Stone bore	12.7 mm

Includes: grinding stones (P36 & P80) - 2 spark arresters - 2 work rests - safety glasses
 Accessories: BGA1055, BGA1056

BENCH GRINDER

250W-150MM BGM1020



Features

- Wet (P80) and dry (P36) grinding stone for various applications
- Dust proof switch
- Spark arrester

Specifications

Mains voltage	230V~, 50Hz
Power input	250W
No load speed	2950/min
Stone dimensions dry	150x20 mm
Stone dimensions wet	150x40 mm
Stone bore dry	12.7 mm
Stone bore wet	20 mm

Includes: grinding stones (P36 & P80) - 2 spark arresters - 2 work rests - safety glasses
 Accessories: BGA1055, BGA1057

WET AND DRY GRINDER

250W BGM1021



Features

- Connection for dust extraction
- Exclusive design with soft coated grip
- Sanding surface size 92x187 mm

Specifications

Mains voltage	230V~, 50Hz
Power input	180W
No load speed	12000/min
Sanding movements	24000/min

Includes: 5 pcs sanding paper P80 - 5 pcs sanding paper P120 - universal dust adapter
 Accessories: PSA1028, PSA1029, PSA1030, PSA1031

ORBITAL SANDER

180W PSM1024



Features

- Active dust extraction
- Ergonomic design
- Velcro® base plate

Specifications

Mains voltage	230V~, 50Hz
Power input	220W
No load speed	13000/min
Sanding movements	26000/min

Includes: 5 pcs sanding paper P80 - 5 pcs sanding paper P120 - dust bag - storage case
 Accessories: PSA1006, PSA1007, PSA1008

DETAIL SANDER

220W PSM1013



Features

- Adjustable vibration speed
- Ergonomic soft grip
- Velcro® base plate

Specifications

Mains voltage	230V~, 50Hz
Power input	280W
No load speed	6000-10000/min
Sanding movements	12000-20000/min
Sanding surface size	90x90x90 mm

Includes: 6 pcs sanding paper P80 - universal dust extraction adapter
 Accessories: PSA1032, PSA1033, PSA1034

DELTA SANDER

280W DSM1009



Features

- Active dust extraction
- Ergonomic soft grip
- Velcro® base plate
- Adjustable front handle and vibration speed

Specifications

Mains voltage	230V~, 50Hz
Power input	480W
No load speed	4000-14000/min
Sanding disc diameter	Ø125 mm

Includes: 6 pcs sanding paper (2x P60, 2xP80, 2xP120) - dust bag
 Accessories: PSA1018, PSA1019, PSA1020

RANDOM ORBITAL SANDER

480W ESM1009



Features

- 2 sanding arms and 1 angled arm included
- Dust bag
- Variable speed for sanding wood, tiles, metal, ceramic, plaster or plastic

Specifications

Mains voltage	230V~, 50Hz
Power input	400W
Sanding belt speed	1070-1650 m/min
Sanding belt size	455x8 mm/455x13 mm

Includes: 12 sanding belts (P40, P80, P120) - 1 sanding arm 8 mm - 1 sanding arm 13 mm - 1 angled arm 13 mm - storage case
 Accessories: EFA1003, EFA1004

PRECISION BELT SANDER

400W EFM1001



Features

- Dual function for both manual and stationary use
- Variable speed

Specifications

Mains voltage	230V~, 50Hz
Power input	950W
Sanding belt speed	220-350 m/min
Sanding surface size	76x135 mm

Includes: 2 clamps and rubber plate for stationary use - 3 sanding belts (P60, P80, P120) - dust bag

Accessories: BSA1013

BELT SANDER

950W BSM1021



Features

- Adjustable sanding belt position
- 150 mm disc for sanding smaller surfaces
- Dust proof switch

Specifications

Mains voltage	230V~, 50Hz
Power input	375W
No load speed belt	275/min
No load speed disc	1400/min

Includes: angle guide - 2 sanding belts (P80 & P120) - sanding discs (P80 & P120) - hex key - wrench

Accessories: BGA1058, BGA1059, BGA1060, BGA1061, BGA1037, BGA1038, BGA1039

BENCH SANDER

375W BGM1003



Features

- For powerful sawing, sanding, scraping and grinding
- One bolt fixation system
- Variable speed

Specifications

Mains voltage	230V~, 50Hz
Power input	250W
No load speed	11000-18000/min

Includes: 1 HSS segment saw blade - 1 plunge cut blade - 1 scrape knife - 1 Velcro® sanding plate - 10 sanding sheets (P80, P120) - hex key - storage case - carbide sawblade

Accessories: OTA1001, OTA1002, OTA1003, OTA1004, OTA1005, PSA1032, PSA1033, PSA1034

MULTI TOOL

250W OTM1004



Features

- Adjustable base plate
- Ergonomic handle
- Spindle lock function
- Quick and easy depth and angle adjustment

Specifications

Mains voltage	230V~, 50Hz
Power input	1200W
No load speed	5000/min
Mitre cut adjustment	0-45°
Max. cutting capacity at 45°	43 mm
Max. cutting capacity at 90°	65 mm
Saw blade bore	20 mm

Includes: TCT T24 saw blade - guide fence - set of carbon brushes - hex key - 2 batteries

Accessories: CSA1007

CIRCULAR SAW

1200W-185MM CSM1033



Features

- Ergonomic design with soft grip
- Laser guidance
- All accessories included for sawing wood, plastics, gypsum board, soft metal and ceramics

Specifications

Mains voltage	230V~, 50Hz
Power input	400W
No load speed	4200/min
Saw blade diameter	54.8 mm
Sawing depth	0-12 mm

Includes: 1 saw blade (T18) - 1 diamond saw blade (G50) - 1 HSS saw blade (T44) - 1 HSS saw blade (T60) - dust extraction hose - 2 hex keys - 3 batteries for laser - storage case
 Accessories: CSA1033, CSA1034, CSA1035, CSA1039

PRECISION CIRCULAR SAW

400W CSM1038



Features

- Ergonomic design with soft grip
- Variable mitre cut adjustment to 45°
- 4 stage pendulum adjustment

Specifications

Mains voltage	230V~, 50Hz
No load speed	800-3000/min
Mitre cut adjustment	0-45°
Max. saw capacity in steel	10 mm
Max. saw capacity in wood	110 mm

Includes: 3 sawblades - parallel guide - 2 hex keys - dust extraction adapter
 Accessories: JSA1004

JIG SAW

710W JSM1014



Features

- Quick release function
- Mitre/parallel guide
- Working table adjustable from 0-45°
- Dust blow function

Specifications

Mains voltage	230V~, 50Hz
Power input	90W
No load speed	1440/min
Max. cutting capacity at 45°	10 mm
Max. cutting capacity at 90°	40 mm

Includes: 10 saw blades - protection cover - 2 hex keys - dust blowing set - 2 saw blade adapters
 Accessories: SSA1001, SSA1002, SSA1003, SSA1004

SCROLL SAW

90W SSM1005



Features

- Powerful mitre saw with aluminum baseplate
- Laser guidance
- Toolless mitre and bevel adjustment

Specifications

Mains voltage	230V~, 50Hz
Power input	1300W
No load speed	4500/min
Max. saw capacity	
mitre 0°, bevel 0°	55x120 mm
mitre 0°, bevel 45°	55x80 mm
mitre 45°, bevel 0°	32x120 mm
mitre 45°, bevel 45°	32x80 mm

Includes: 2 extension bars - back support bar - workpiece clamp - hex key - dust bag - safety glasses - earplugs - 210 mm TCT saw blade (T48) - 2 batteries
 Accessories: MSA1024, MSA1025

MITRE SAW

1300W-210MM MSM1037



Features

- Powerful compound mitre saw with sliding function
- Pre-settings for quick and accurate mitre-angle adjustment
- Laser guidance

Specifications

Mains voltage	230V~, 50Hz
Power input	1500W
No load speed	5000/min
Max. saw capacity	
mitre 0°, bevel 0°	63x310 mm
mitre 0°, bevel 45°	42x310 mm
mitre 45°, bevel 0°	63x210 mm
mitre 45°, bevel 45°	42x210 mm

Includes: 2 extension bars - back support bar - workpiece clamp - hex key - dust bag - dust extraction adapter - safety glasses - earplugs - 210 mm TCT saw blade (T24) - 2 batteries

Accessories: MSA1024, MSA1025

RADIAL MITRE SAW

1500W-210MM MSM1035



Features

- Powerful compound mitre saw with sliding function
- Pre-settings for quick and accurate mitre-angle adjustment
- Laser guidance

Specifications

Mains voltage	230V~, 50Hz
Power input	2000W
No load speed	5000/min
Max. saw capacity	
mitre 0°, bevel 0°	73x310 mm
mitre 0°, bevel 45°	40x310 mm
mitre 45°, bevel 0°	73x210 mm
mitre 45°, bevel 45°	40x210 mm

Includes: 2 extension bars - back support bar - workpiece clamp - hex key - dust bag - dust extraction adapter - safety glasses - earplugs - 255 mm TCT saw blade (T60) - 2 batteries

Accessories: MSA1028, MSA1029

RADIAL MITRE SAW

2000W-255MM MSM1036



Features

- Parallel/mitre guide and clear scale
- Powerful 800W induction motor
- Accurate angle adjustment for 45° bevel cuts

Specifications

Mains voltage	230V~, 50Hz
Power input	800W
No load speed	2950/min
Max. cutting capacity at 45°	27 mm
Max. cutting capacity at 90°	45 mm
Table	500x335 mm

Includes: 200 mm TCT saw blade T24 - mitre/parallel guide - push stick - safety glasses - earplugs

Accessories: MSA1021, MSA1022

TABLE SAW

800W-200MM TSM1032



Features

- Saw blade adjustable from 0° till 45°
- Dust extraction
- Safety switch and thermal protection

Specifications

Mains voltage	230V~, 50Hz
Power input	1500W
No load speed	5700/min
Max. cutting capacity at 45°	60 mm
Max. cutting capacity at 90°	73 mm
Table	625x445 mm

Includes: 250 mm TCT saw blade T40 - mitre/parallel guide - push stick - safety glasses - earplugs

Accessories: MSA1026, MSA1027, MSA1028, MSA1029

TABLE SAW

1500W-250MM TSM1030



Features

- Saw blade adjustable from 0° till 45°
- Powerful 1700W motor with thermal protection
- Laser guidance

Specifications

Mains voltage	230V~, 50Hz
Power input	1700W
No load speed	4800/min
Max. cutting capacity at 45°	60 mm
Max. cutting capacity at 90°	73 mm
Table	948x944 mm

Includes: 254 mm TCT saw blade T40 - mitre/parallel guide - push stick - 3 table extensions - hose - safety glasses - earplugs - 2 batteries

Accessories: MSA1026, MSA1027, MSA1028, MSA1029

TABLE SAW

1700W-254MM TSM1031



Features

- Water cooled blade
- Safety switch
- Adjustable work table from 0-45°
- Durable chrome plated table

Specifications

Mains voltage	230V~, 50Hz
Power input	600W
No load speed	2950/min
Max. cutting capacity at 45°	18 mm
Max. cutting capacity at 90°	34 mm
Table	330x360 mm

Includes: diamond saw blade 180 mm - water tray - parallel guide - 2 wrenches - safety glasses - earplugs

Accessories: TCA1004

TILE CUTTER

600W TCM1010



Features

- Water cooled blade
- Safety switch
- Adjustable work table from 0-45°
- Durable chrome plated table

Specifications

Mains voltage	230V~, 50Hz
Power input	900W
No load speed	2950/min
Max. cutting capacity at 45°	20 mm
Max. cutting capacity at 90°	41 mm
Table	500x400 mm

Includes: diamond saw blade 200 mm - water tray - mitre/parallel guide - wrench - safety glasses - earplugs

Accessories: TCA1007

TILE CUTTER

900W TCM1011



Features

- Soft coated handle
- Reversible knives
- Adjustable planing depth (8 positions)

Specifications

Mains voltage	230V~, 50Hz
Power input	650W
No load speed	16500/min
Max. planing width	82 mm
Max. planing depth	2 mm

Includes: parallel guide - dust bag - wrench - spare belt

Accessories: PPA1003

PLANER

650W PPM1010



Features

- Accurate depth adjustment: 0.1 mm
- Variable speed control
- Soft grip handles
- LED work light

Specifications

Mains voltage	230V~, 50Hz
Power input	1300W
No load speed	9000-30000/min
Max. cutting depth	60 mm
Max. cutter diameter	30 mm

Includes: parallel guide - template guide - 6 router bits - wrench - hex key - dust extraction adapter

Accessories: PRA1008, PRA1011

PRECISION ROUTER

1300W PRM1015



Features

- Equipped with connection for dust extraction hose
- Robust and stable aluminum construction, provided with rubber feet
- Fits all FERM routers and most other routers
- Easy and accurate adjustment

Specifications

Mains voltage	230V~, 50Hz
Table	455x330 mm
Max. base plate diameter router	163 mm

ROUTER TABLE

PRA1011



Features

- For creating precise joints and sawing parquet along walls
- Easy adjustment for angle and material thickness
- Aluminum base plate
- Spindle lock function

Specifications

Mains voltage	230V~, 50Hz
Power input	900W
No load speed	11000/min
Cutting depth	0-14 mm
Fence adjustment	0-90°

Includes: 50 joint plates (size 20) - saw blade - wrench - dust bag - set carbon brushes - storage case

Accessories: BJA1002, BJA1003, BJA1004, BJA1005

PRECISION BISCUIT JOINTER

900W BJM1009



Features

- Ergonomic design with soft grip
- Universal dust extraction adapter
- Laser guidance
- Adjustable width and depth setting

Specifications

Mains voltage	230V~, 50Hz
Power input	1700W
No load speed	4000/min
Cutting depth	0-28 mm
Cutting width	14/19/29 mm

Includes: 2 pcs diamond discs - 2 pcs AAA batteries - chisel - spanner - hex key - storage case

Accessories: WSA1001

WALL SLOTTER

1700W-125MM WSM1009



Features

- Ergonomic design with soft grip
- Universal dust extraction adapter
- Laser guidance
- Wide base plate

Specifications

Mains voltage	230V~, 50Hz
Power input	1600W
No load speed	6000/min
Cutting depth	8-40 mm (8 positions)
Cutting width	8-30 mm (6 positions)

Includes: 2 pcs diamond discs - 2 pcs AAA batteries - chisel - spanner - set carbon brushes - canvas storage bag

Accessories: WSA1002

WALL SLOTTER

1600W-150MM WSM1008

Features

- 2 speeds and soft start
- Ideal for mixing viscous materials
- Wide grip
- Variable speed control

Specifications

Mains voltage	230V~, 50Hz
Power input	1400W
No load speed position I	180-380/min
No load speed position II	300-650/min
Whisk diameter	120 mm
Whisk length	680 mm

Includes: whisk for general purposes - 2 wrenches - set carbon brushes

Accessories: PMA1004, PMA1005



PAINT/CEMENT MIXER

1400W PMM1006

Features

- 2-stroke generator with up to 8 hours runtime on a single tank of fuel
- Large 4.5 liter tank
- Overload switch
- Shock absorbing feet

Specifications

Mains voltage	230V~, 50Hz
Continuous output	700W
Max. output	800W
Fuel	Gasoline and oil Mixture (50:1)

Includes: spark plug socket - driver handle - oil cup



AIR COOLED GENERATOR

700W 2HP PGM1010

Features

- 4-stroke generator with 2 power sockets
- Large 15 liter tank ensures continuous operation up to 11 hours runtime
- Automatic voltage regulator
- Overload protection

Specifications

Mains voltage	230V~, 50Hz
Continuous output	2000W
Max. output	2200W
Fuel	Unleaded gasoline

Includes: 2 spark plug sockets - screwdriver - spanner - fuel indicator



AIR COOLED GENERATOR

2000W 6.5HP PGM1008



Features

- Current indicator
- Thermal cut-out with control lamp
- Suitable for use with either 230V~ or 400V~
- Forced cooling

Specifications

Mains voltage	230/400V~, 50Hz
Welding current	400V max 160A, 230V max 140A
Electrode thickness	2.0-4.0 mm

Includes: welding mask - scaling hammer/steel-wire brush - quick instruction card
 Accessories: WEA1011, WEA1012, WEA1013, WEA1014, WEA1015, WEA1016, WEA1017, WEA1018, WEA1024, WEA1057, WEA1058

ARC WELDER

55-160A WEM1035

Features

- Current indicator
- Thermal cut-out with control lamp
- Forced cooling
- Continuous adjustable welding current

Specifications

Mains voltage	230V~, 50Hz
Welding current	40-100A
Electrode thickness	1.6-2.5 mm

Includes: welding mask - scaling hammer/steel-wire brush - quick instruction card
 Accessories: WEA1011, WEA1012, WEA1013, WEA1014, WEA1015, WEA1016, WEA1017, WEA1018, WEA1024, WEA1057, WEA1058

ARC WELDER

40-100A WEM1042

Features

- Powerful single cilinder pump
- Universal, pressure adjustment from 0-8 bar
- Silent direct drive induction motor
- 1 universal 1/4" quick coupling
- 2 manometers for tank and outlet pressure

Specifications

Mains voltage	230V~, 50Hz
Power input	750W-1.1HP
No load speed	2850/min
Air displacement	118 liter/min

Includes: oil
 Accessories: CRA1015, CRA1024, CRA1025, CRA1026, CRA1027, ATA1018, ATA1021, ATA1025, ATA1026, ATA1027, ATA1033, ATM1036, ATM1050, ATM1039, ATM1040, ATM1041, ATM1042, ATM1044

OIL LUBRICATED COMPRESSOR

1.1HP-750W-8L CRM1044

Features

- Powerful single cilinder pump
- Universal, pressure adjustment from 0-8 bar
- Silent direct drive induction motor
- 1 universal 1/4" quick coupling
- 2 manometers for tank and outlet pressure

Specifications

Mains voltage	230V~, 50Hz
Power input	1100W-1.5HP
No load speed	2850/min
Air displacement	155 liter/min

Includes: oil
 Accessories: CRA1015, CRA1024, CRA1025, CRA1026, CRA1027, ATA1018, ATA1021, ATA1025, ATA1026, ATA1027, ATA1033, ATM1036, ATM1050, ATM1039, ATM1040, ATM1041, ATM1042, ATM1044

OIL LUBRICATED COMPRESSOR

1.5HP-1100W-24L CRM1045





Features

- Powerful single cilinder pump
- Universal, pressure adjustment from 0-8 bar
- Silent direct drive induction motor
- 1 universal 1/4" quick coupling
- 2 manometers for tank and outlet pressure

Specifications

Mains voltage	230V~, 50Hz
Power input	1500W-2HP
No load speed	2850/min
Air displacement	206 liter/min

Includes: oil

Accessories: CRA1015, CRA1024, CRA1025, CRA1026, CRA1027, ATA1018, ATA1021, ATA1025, ATA1026, ATA1027, ATA1033, ATM1036, ATM1050, ATM1039, ATM1040, ATM1041, ATM1042, ATM1044

OIL LUBRICATED COMPRESSOR

2HP-1500W-50L CRM1046

Features

- Compact design
- Spindle lock
- Variable speed

Specifications

Mains voltage	230V~, 50Hz
Power input	160W
No load speed	15000-35000/min
Capacity of spring chuck	3.2 + 2.4 mm

Includes: flexible shaft - adjustable stand - 40 accessories - storage case

Accessories: CTA1008, CTA1007



COMBITOOL SET

160W CTM1010

Features

- Compact design
- Spindle lock
- Variable speed

Specifications

Mains voltage	230V~, 50Hz
Power input	160W
No load speed	15000-35000/min
Capacity of spring chuck	3.2 + 2.4 mm

Includes: 40 accessories - storage case

Accessories: CTA1008, CTA1007



COMBITOOL

160W CTM1012

Features

- Ergonomic handle with soft grip
- Suitable for staples (6-14 mm) and brad nails (15 mm)

Specifications

Mains voltage	230V~, 50Hz
Staple width	10 mm
Staple length	6-14 mm
Nail length	15 mm

Includes: 400 staples - 100 brad nails

Accessories: ETA1005, ETA1006, ETA1008



ELECTRIC TACKER

ETM1003



Features

- 2 heat settings
- Stationary mode (stable stand on table)

Specifications

Mains voltage	220-240V~, 50Hz
Power input	2000W
Air flow position I-II	300/500 liter/min
Air temperature position I-II	450/600°C

Includes: reduction nozzle - fishtail nozzle - storage case

HOT AIR GUN

2000W HAM1015



Features

- Adjustable stand
- Lightweight glue gun
- LED light

Specifications

Mains voltage	230V~, 50Hz
Power input	16W
Diameter glue sticks	11.2 mm

Includes: 6 glue sticks - round nozzle - flat nozzle - storage case
Accessories: GGA1002

GLUE GUN

16W GGM1002



Features

- LED light
- Less than 1 min. heating time
- Durable solid housing
- Steady stand

Specifications

Mains voltage	230V~, 50Hz
Power input	100W/30W

Includes: soldering gun with tip - soldering iron - soldering clamp with magnifying glass - solder suction tool - stand for soldering iron - roll of solder - soldering paste - terminal pin - spare tip - storage case

SOLDERING SET

100W/30W SGM1001



Features

- For precise soldering, shrinking, hot cutting, lighting your fireplace, for kitchen use etc.
- Uses standard lighter gas

Specifications

Soldering temperature	375°C
Max runtime	35 min

Includes: 8 accessories - storage case

GAS SOLDERING GUN/BLOW TORCH

SGM1006



Features

- High air displacement
- Use as blower or vacuum cleaner
- High volume: max. 3.0m³ / min
- Lock on switch
- 3m cable

Includes: dust bag

Specifications

Mains voltage	220-240V~, 50Hz
Power input	400W
Variable speed	6000-14000/min
Max. air displacement	3.0m ³ /min

ELECTRIC BLOWER

400W EBM1003



Features

- Automatic overload, short circuit and false poling protection
- Practical LED charge indicator
- Ampère meter

Includes: set battery clamps

Specifications

Mains voltage	230V~, 50Hz
Output	DC 12V
Charge current	5A
Battery capacity	min. 10Ah, max. 50Ah

BATTERY CHARGER

12V BCM1018



Features

- Automatic overload, short circuit and false poling protection
- 75A jump starter
- Practical LED charge indicator
- Ampère meter

Includes: set battery clamps

Specifications

Mains voltage	230V~, 50Hz
Output	DC 6-12V
Charge current	2A, 6A, 12A, start 75A
Battery capacity	min. 20Ah, max. 120Ah

BATTERY CHARGER/JUMP STARTER

6V-12V BCM1017



Features

- Non-rotating steel rope which reduces twisting of the loads during lifting
- Operator switch with emergency stop function

Includes: 2 mounting brackets - 2 load hooks

Specifications

Mains voltage	230V~, 50Hz
Power input	500W
Lifting load without/with pulley	125 kg/250 kg
Lifting height without/with pulley	12 m/6 m

ELECTRIC LEVER HOIST

500W LHM1011



Features

- Compact bottle jack
- For lifting heavy objects like cars, caravans, trailers up to 2000 kg

Specifications

Spindle travel	48 mm
Lifting height	116 mm
Min./max. height	181-345 mm

Includes: storage case

BOTTLE JACK

MAX. 2000KG JBM1001



Features

- Solid construction with integrated safety valve against overloading
- Control release system
- Two ball bearing castors

Specifications

Max. disc height	356 mm
Min. disc height	135 mm

Includes: storage case

TROLLEY JACK KIT

MAX. 2000KG TJM1008



Features

- For carrying objects and weights up to 150 kg
- Foldable

Specifications

Dimensions platform	734x480 mm
---------------------	------------

PLATFORM TRUCK

MAX.150KG TTM1027



Features

- Ball bearing wheels with inflatable tyres
- Stable base plate

Specifications

Dimension toe plate	350x180 mm
Height hand truck	1195 mm

HAND TRUCK

MAX. 225KG TTM1028

FERM POWER AQUA



DESIGNED AND DEVELOPED IN **THE NETHERLANDS** 



Features

- Aluminum pump
- Seperate detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1400W
Max pressure	105 bar
Max flow	375 liter/hour

Includes: standard lance - standard spray gun - 6 m hose
 Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1400W GRM1011



Features

- Aluminum pump
- Seperate detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1650W
Max pressure	105 bar
Max flow	427 liter/hour

Includes: standard lance - standard spray gun - 6 m hose
 Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1650W GRM1012



Features

- Aluminum pump
- Seperate detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1850W
Max pressure	135 bar
Max flow	427 liter/hour

Includes: standard lance - standard spray gun - 6 m hose
 Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1850W GRM1013



Features

- Aluminum pump
- Built in detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1650W
Max pressure	105 bar
Max flow	412 liter/hour

Includes: high-low pressure lance - standard spray gun - 6 m hose
 Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1650W GRM1014



Features

- Aluminum pump
- Built in detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1850W
Max pressure	135 bar
Max flow	412 liter/hour

Includes: high-low pressure lance - standard spray gun - 6 m hose

Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1850W GRM1015



Features

- Aluminum pump and induction motor
- Built in detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1200W
Max pressure	105 bar
Max flow	412 liter/hour

Includes: high-low pressure lance - standard spray gun - 6 m hose on hose reel

Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1200W GRM1016



Features

- Aluminum pump and induction motor
- Built in detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1500W
Max pressure	135 bar
Max flow	412 liter/hour

Includes: high-low pressure lance - standard spray gun - 6 m hose on hose reel

Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1500W GRM1017



Features

- Aluminum pump and induction motor
- Built in detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	1800W
Max pressure	165 bar
Max flow	435 liter/hour

Includes: high-low pressure lance - standard spray gun - 6 m hose on hose reel

Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

1800W GRM1018



Features

- Aluminum pump and induction motor
- Built in detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	2500W
Max pressure	195 bar
Max flow	487 liter/hour

Includes: high-low pressure lance - standard spray gun - 6 m hose on hose reel
 Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

2500W GRM1019



Features

- Bronze pump and induction motor
- Built in detergent bottle
- Auto stop system
- Accessory storage facility
- 5 m cable

Specifications

Mains voltage	230V~, 50Hz
Power input	3000W
Max pressure	225 bar
Max flow	510 liter/hour

Includes: high-low pressure lance - standard spray gun - 6 m hose on hose reel
 Optional: accessory pack - different hose lengths - different cable lengths

HIGH PRESSURE CLEANER

3000W GRM1020



Turbo lance with rotating nozzle
 Fits all FERM POWER AQUA cleaners

TURBO LANCE



Water powered rotary brush for medium to large surfaces
 Fits all FERM POWER AQUA cleaners

ROTARY BRUSH



Fixed brush for general purpose
 Fits all FERM POWER AQUA cleaners

BRUSH



Suitable for large surfaces such as patios and driveways
 Fits all FERM POWER AQUA cleaners

PATIO CLEANER

OPTIONAL ACCESSORY PACK HIGH PRESSURE CLEANERS



